




Rowa Vmax[®] 320

Technical data

Dimensions	Width	3.23 m		
	Height	2.00–3.00 m (in 5 cm intervals)		
	Length	3.58–5.98 m (in 48 cm intervals)		
Sound level	The sound pressure level is 67 dB (A)			
Possible locations	Ground floor, basement, upper floor			
Input and output times	Input	Approx. 3 seconds (Direct availability for over-the-counter sales)		
	Output	Approx. 8 – 16 seconds		
Storable package sizes	Square packages	Min. package size (D × W × H)	35 × 15 × 15 mm	
		Max. package size (D × W × H)	230 × 145 × 140 mm	
		Weight	5–1,000 g	
	Round packages	Min. package size	Ø 45 mm, height: 15 mm	
		Max. package size	Ø 140 mm, height: 145 mm	
		Weight	5–800 g	
Barcodes	Identification and reading of PZN, PZN8, EAN, and 2D barcodes			
Electrical Parameter	8 A, 230V, 50/60 Hz			
Power consumption	In operation	650 W with one picking head		
	In standby mode	348 W with one picking head		
Safety	System protection thanks to uninterrupted power supply (UPS), backup computer, remote monitoring			
Options	2 nd input belt	Rowa [®] Label (labeling)		
	Rowa system backup	Rowa iProLog [®] (integrated fully automatic input)		
	Rowa cleaning module	Rowa ProLog [®] external (fully automatic input)		
	Rowa refrigerated unit (height 2.300, 2.900 mm)			
Conveyor technology	Conveyor belt, servo-controlled lift, spiral chute with Ø 400 mm, possible to connect up pneumatic tube transport			
Colors	White (RAL 9016), anthracite (RAL Design 000-25-00)			

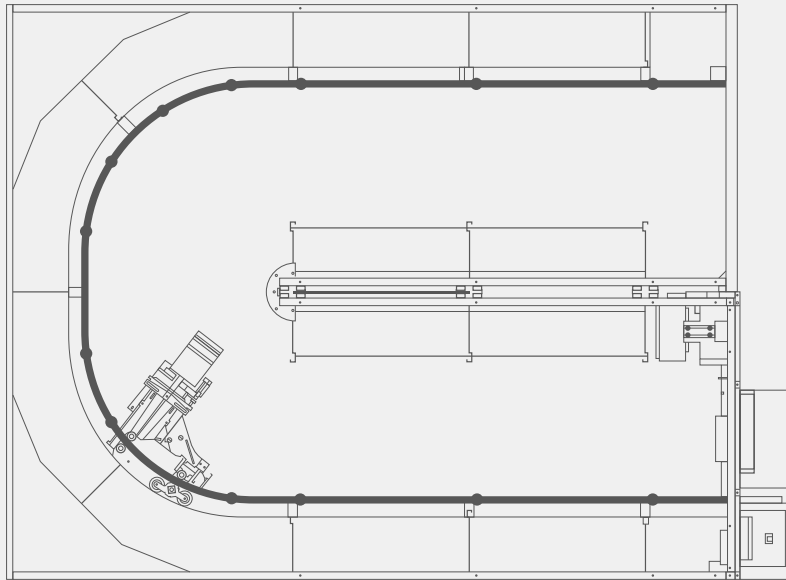

Rowa Vmax 320
ideal for square surfaces

Becton Dickinson Rowa Germany GmbH, Rowastraße, D-53539 Kelberg
+49 2692 92 06 0 tel, +49 2692 92 06 1299 fax

bd.com/rowa



© 2018 BD. All rights reserved. BD, the Logo, Rowa, Rowa Label, Rowa ProLog, Rowa iProLog and Rowa Vmax are the property of Becton, Dickinson and Company. 5/2018 / 0000MS07486 iss1